




EN 14439
C25

UNE-EN-ISO 9001

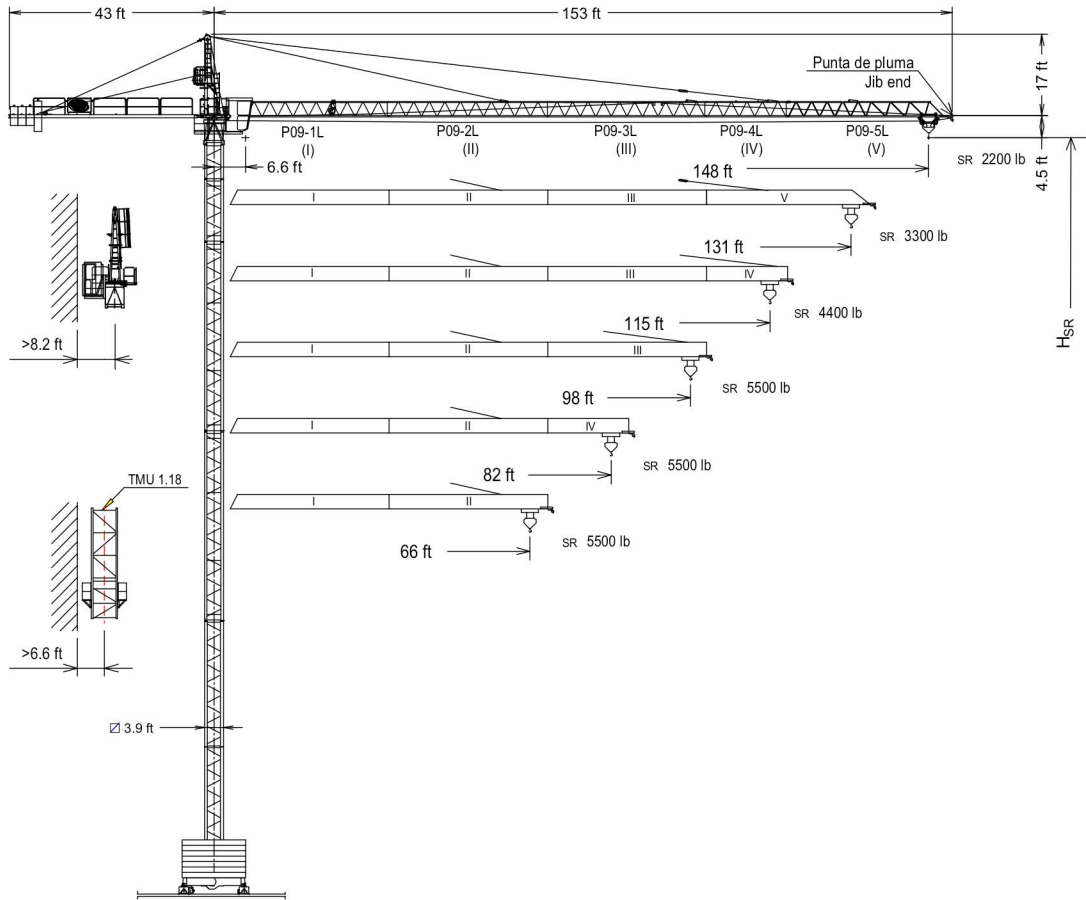

H_{SR} = Altura máxima bajo gancho sin arriostrar (m).
Maximum height under hook without fastening (m).




$H_{SR} - 6.6$ ft.


* Punta de pluma / Jib end

TMU 1.18	202.35.500	TN2	146.32.500
P09-1L	155.40.000	BTX 45/BEX 45	137.20.500
P09-2L	155.41.000	BTX 38R/BEX 38R	137.20.000
P09-3L	155.42.000	BTX 38/BEX 38	149.20.000
P09-4L	155.43.000	BEX 45L	155.23.500
P09-5L	155.44.500	BEX 38RL	155.23.800
Punta de pluma / Jib end*	155.45.000	BEX 38L	155.23.000
TR 12	146.30.000	ABH 75	152.23.000
TN 12	146.31.000	ABH 90	146.23.000
TR 8RM	202.30.000	AR 12	137.21.000
TR 8M	146.30.800	AN 12	146.21.000
TR 4	800.32.300	TN 4	146.21.000
TN 4	146.32.000	BE 442	146.24.850

(H) TRASLACIÓN / TRAVELLING

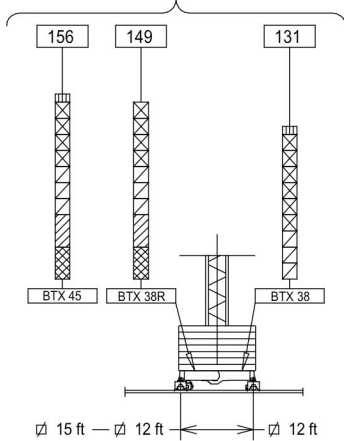

(H) ESTACIONARIA / STATIONARY

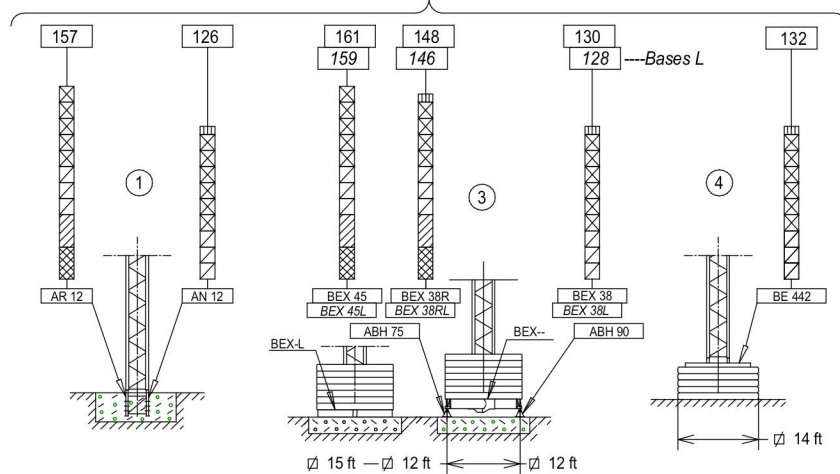



- TN 2
- TR 8RM
- TR 8M
- TN 4
- TN 12
- TR 4
- TR 12


















Fecha / Date: 04/06/2020



FEM 1005 - C25

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without previous warning. This information is supplied without liability

CARGAS / LOADS		Cargas máximas / Maximum loads						J4510
	SR1 (lb)	SR1 - 4400 lb						
	4400 lb @...[ft]	Alcance del gancho [ft] / Hook reach [ft]						
		66	82	98	115	131	148	
148	82	4400	4400	3580	2990	2545	2200	
131	102	4400	4400	4400	3860	3300	---	
115	115	4400	4400	4400	4400	---	---	
98	98	4400	4400	4400	---	---	---	
82	82	4400	4400	---	---	---	---	
66	66	4400	---	---	---	---	---	

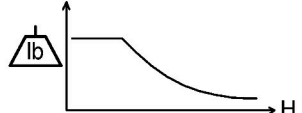CARGAS / LOADS		Cargas máximas / Maximum loads						J4510
	SR2 (lb)	SR2 - 5500 lb						
	5500 lb @...[ft]	Alcance del gancho [ft] / Hook reach [ft]						
		66	82	98	115	131	148	
148	67	5500	4400	3580	2990	2540	2200	
131	84	5500	5500	4600	3860	3300	---	
115	94	5500	5500	5235	4400	---	---	
98	98	5500	5500	5500	---	---	---	
82	82	5500	5500	---	---	---	---	
66	66	5500	---	---	---	---	---	

CARACTERISTICAS DE MECANISMOS / MECHANISMS FEATURES										J4510
*opcional *optional										
	2870 5510 5510 150 75 16	2425 4410 4410 184 92 20	2870 5510 0..210 0..105	2425 4410 0..270 0..135	0..82 ft/min	0... 0,8 r/min sl/min	98/196 ft/min *0...98 *98...196 ft/min	3.3 ft/min		
	H ≤ SR 633 ft		SR 620 ft			EC1846 EC1856		AMPERAGE = 40 A		
						480V 60Hz	EC2566 VF EC2580 VF		AMPERAGE = 45 A	

LASTRES INFERIORES / LOWER BALLASTS							J4510	
		H (ft)	59	72	98	131	156	161
BEX 45 / BTX 45			6		8	10	14	16
BEX45L			8			10	14	16
BEX 38R / BTX 38R			6	8	10	12	16	---
BEX 38 / BTX 38			6	8	10	12	---	---
BEX 38RL				8	10	12	16	---
BEX 38L				8	10	12	---	---
		H (ft)	105			132		
BE 442			16			20		

H: Altura bajo gancho / Height under hook

Para alturas intermedias tomar el lastre correspondiente a la altura superior / For intermediate heights take the ballast corresponding to the higher height



Fecha / Date: 04/06/2020

 FEM 1005 - C25

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without previous warning. This information is supplied without liability

DENOMINACIÓN / DENOMINATION		L [ft]	A [ft]	H [ft]	P / W [lb]	
Torre Tower	TR 8RM – TR 8M	26.5	3.9	3.9	5675-5545	
	TR 12 – TN 12	39.4	3.9	3.9	6260-6130	
	TR 4	13.0	3.8	3.8	2360	
	TN 4	13.4	3.9	3.9	2325	
	TN 2	7.5	3.9	3.9	1730	
Conjunto asiento pista, punta de torre, orientación y elevación <i>Slewing table assembly, tower head, slewing and hoisting mechanism</i>			22.9	5.4	7.9	7985
Tramo de pluma Jib section	P09 1L (I)	33.2	3.3	3.8	1435	
	P09 2L (II)	33.2	2.8	3.6	1210	
	P09 3L (III)	33.3	2.8	3.6	1245	
	P09 4L (IV)	17.3	2.8	3.6	550	
	P09 5L (V)	33.2	2.8	3.6	900	
Polipasto Hook assembly	SR		2.5	0.5	3.1	300
Carro Trolley	SR		3.3	4.4	2.4	245
Contrapluma con plataformas Counterjib with platforms			39.2	4.4	1.3	2080
Plataforma y cabina Platform and cabin			12.1	5.3	7.4	1810
Contrapeso Counterweight	Grande / Big		3.5	1.6	6.6	5205
	Pequeño / Small		3.5	1.6	4.3	3305
Base grúa Testero largo Crane base Long carriage	BTX 38	20.0	2.1	5.0	3475	
	BTX 38R	20.0	2.1	5.2	3950	
	BTX 45	23.0	2.1	5.2	4550	
	BTX 38L	17.9	1.8	3.2	2555	
	BTX 38RL	17.9	1.8	2.9	1875	
	BTX 45L	13.2	1.8	2.9	1455	
Base grúa Testero corto Crane base Short carriage	BEX 38	18.2	1.0	4.2	3065	
	BEX 38R	18.2	1.0	4.6	3505	
	BEX 45	21.5	1.0	4.6	4105	
Mecanismo traslación grúa Crane travelling mechanism			3.1	1.8	2.2	645
Lastre Ballast	∅ 9 ft	9.8	1.4	4.3	8155	
	∅ 12 ft - ∅ 15 ft	13.1	1.1	4.3	9040	
	BE 442	6.9	1.1	6.9	7605	
	BE 434	11.2	1.1	5.5	9480	
Torre de montaje Jacking cage		TMU 1.18	23.4	5.8	5.6	7055
Torre de montaje sin puerta, carro, plataforma carro y viga de apoyo Jacking cage without door, trolley, trolley platform and beam assembly			23.4	5.8	5.6	5400

1	15	TN 4	1	9	TN 2	TN 2	7	9	1	TN 4	146.32.000	15	1
2	28	TN 4	2	28	TN4	TN 4	13	22	2	TN 4		28	2
3	67	TN 12	3	61	TN 12	TN 12	39	61	3	TN 12	146.31.000	67	3
4	106	TR 12	4	100	TR 12	TR 12	39	100	4	TR 12	146.30.000	106	4
5	132	TR 8M	5	126	TR 8M	TR 8M	26	126	5	TR 8M	146.30.800	132	5
6	144	TX-90/TXXR	6	138	TX-90/TXXR	TX-90/TXXR				TX-90/TXXR	202.36.500		
7	154	T 3-90	7	148	T 3-90	T 3-90	3	138	6	T 3-90	133.32.000	144	6
8	163		8	157			10	148	7			154	7
9	173		9	177	T6-150A	T6-150A	19	167	8	T6-150A	161.31.300	173	8
			10	196	T6-150	T6-150		186	9	T6-150	161.31.000	192	9
			11	208	TL20/TX150	TL20/TX150	13	198	10	TL20/TX150	161.36.000	205	10
			12	227	TL20-5,6	TL20-5,6	18	217	11	TL20-5,6		223	11
					TS20-5,6A	TS20-5,6A	18	235	12	TS20-5,6A		241	12
					TS20-5,6	TS20-5,6	18	254	13	TS20-5,6		260	13
					TSR20-5,6A	TSR20-5,6A	18			TSR20-5,6A	204.31.300	278	14
					TSR20-5,6	TSR20-5,6	18			TSR20-5,6	204.31.000		

AN 90 133.21.000
 AND 90 133.21.800
 AN 150 161.21.000
 AND 150 161.21.050
 AL 20 153.21.800
 ALD 20 160.21.250
 AS 20 160.21.010
 ASD 20/24 160.21.080
 ASR 20 160.21.200
 ASRD 20/24 156.21.000

T: Torre / Tower
 H: Altura / Height

: H – 6.6 ft.

Otras configuraciones de torre / Other tower configuration

Transporte Transport

H=126 + AN12

2x

3x **HIGH CUBE 40'**

$\le 6 \times \text{TN4}$

TREPADO / CLIMBING

J4510

5.1
4.3
2.9
h
H
H < 655 ft

$h_{max}: 3 \times \text{TR4} + 6 \times \text{TN4}$

	▶	■
h (ft)	118	
D (ft)	28.2 - 32.8	
P (lbf)	71700	66100
Rmax (lbf)	19800	56200

TR4: 800.32.300

Trepado interno / Internal climbing

- Viento fuera de servicio / Out of service wind
- Consultar / Consult
- En servicio / In service
- Fuera de servicio / Out of service



GSM: +33(0)6 11 16 84 14

LOC & MAT

E-mail : contact@locetmat.com
 Web Site : www.locetmat.com

Tel : +33(0)4 68 92 50 92

FEM 1005 – C25