





EN 14439
C25

UNE-EN-ISO 9001

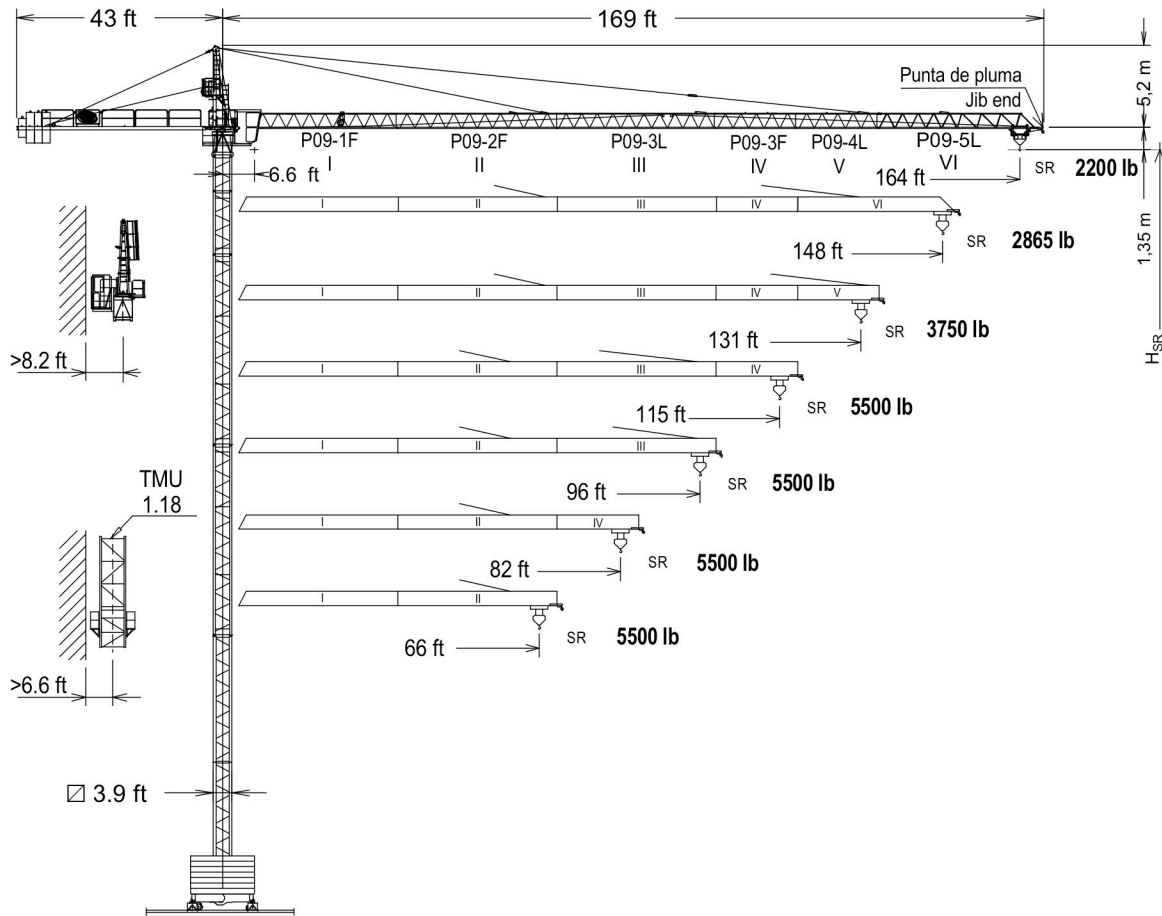

H_{SR} = Altura máxima bajo gancho sin arriostrar (m).
Maximum height under hook without fastening (m).





* Punta de pluma / Jib end

TMU 1.18	202.35.500	TN 4	146.32.000
P09-1F	157.40.000	TN2	146.32.500
P09-2F	157.41.000	BTX 45/BEX 45	137.20.500
P09-3L	155.42.000	BTX 38R/BEX 38R	137.20.000
P09-3F	157.43.000	BTX 38/BEX 38	149.20.000
P09-4L	155.43.000	BEX 45L	155.23.500
P09-5L	155.44.500	BEX 38RL	155.23.800
Punta de pluma / Jib end*	155.45.000	BEX 38L	155.23.000
TR 12	146.30.000	ABH 75	152.23.000
TN 12	146.31.000	ABH 90	146.23.000
TR 8RM	202.30.000	AR 12	137.21.000
TR 8M	146.30.800	AN 12	146.21.000
TR 4	800.32.300	BE 442	146.24.850

(H) TRASLACIÓN / TRAVELLING

(H) ESTACIONARIA / STATIONARY

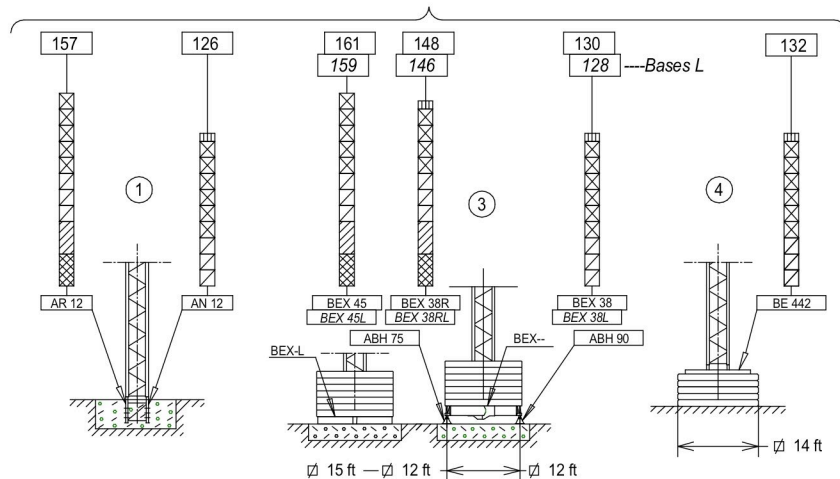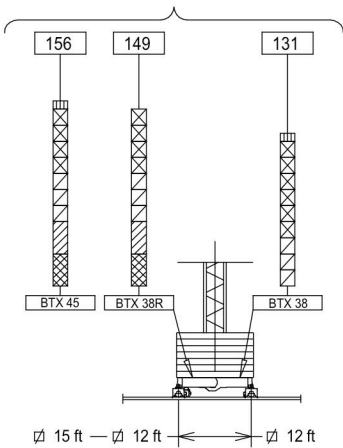



- TN 2
- TR 8RM
- TR 8M
- TN 4
- TN 12
- TR 4
- TR 12















Fecha / Date: 04/06/2020



FEM 1005 - C25

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without previous warning. This information is supplied without liability

CARGAS / LOADS		Cargas máximas / Maximum loads							J5010
	SR1 (lb)	SR1 - 4400 lb							
	4400 lb @...[ft]	Alcance del gancho [ft] / Hook reach [ft]							
		66	82	98	115	131	148	164	
164	90	4400	4400	3970	3340	2870	2500	2200	
148	101	4400	4400	4400	3810	3280	2870	---	
131	113	4400	4400	4400	4340	3750	---	---	
115	115	4400	4400	4400	4400	---	---	---	
98	98	4400	4400	4400	---	---	---	---	
82	82	4400	4400	---	---	---	---	---	
66	66	4400	---	---	---	---	---	---	

CARGAS / LOADS		Cargas máximas / Maximum loads							J5010
	SR2 (lb)	SR2 - 5500 lb							
	5500 lb @...[ft]	Alcance del gancho [ft] / Hook reach [ft]							
		66	82	98	115	131	148	164	
164	73	5500	4850	3970	3340	2865	2500	2200	
148	82	5500	5500	4520	3810	3280	2870	---	
131	92	5500	5500	5150	4340	3750	---	---	
115	115	5500	5500	5500	5500	---	---	---	
98	98	5500	5500	5500	---	---	---	---	
82	82	5500	5500	---	---	---	---	---	
66	66	5500	---	---	---	---	---	---	

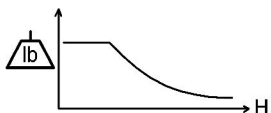CARACTERISTICAS DE MECANISMOS / MECHANISMS FEATURES		Cargas máximas / Maximum loads								J5010			
*opcional *optional		EC1846 SR2 13,2 kW		EC1856 SR1 13,2 kW		*EC2566VF SR2 18,4 kW		*EC2580VF SR1 18,4 kW					
		2870 5510 5510		2425 4410 4410		2870 5510		2425 4410		9 / 12 / 15 ft TG825VF 2x3 kW	OG708VF 5,5 kW	TC360 / *TC360VF 1,9 / *1,8 kW	TH1010 9,2 kW
	lb ft/min	150	75	16	184	92	20	0..210	0..105	0..82 ft/min	0... 0,8 r/min sl/min	98/196 ft/min *0...98 *98...196 ft/min	3.3 ft/min
	H	H ≤ SR 633 ft				SR 620 ft					EC1846 EC1856		AMPERAGE = 42 A
											EC2566 VF EC2580 VF		AMPERAGE = 51 A

LASTRES INFERIORES / LOWER BALLASTS		Cargas máximas / Maximum loads							J5010
	H (ft)	59	72	98	131	156	161		
BEX 45 / BTX 45	 9050 lb	6		8	10	14	16		
BEX45L		8		10	14	16			
BEX 38R / BTX 38R		6	8	10	12	16	---		
BEX 38 / BTX 38		6	8	10	12	---	---		
BEX 38RL		8	10	12	16	---			
BEX 38L		8	10	12	---	---			
	H (ft)	105				132			
BE 442	 7600 lb	16				20			

H: Altura bajo gancho / Height under hook














Para alturas intermedias tomar el lastre correspondiente a la altura superior / For intermediate heights take the ballast corresponding to the higher height

Fecha / Date: 04/06/2020

 FEM 1005 - C25



Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without previous warning. This information is supplied without liability

DENOMINACIÓN / DENOMINATION		L [ft]	A [ft]	H [ft]	P / W [lb]	
Torre Tower	TR 8RM – TR 8M	26.5	3.9	3.9	5675-5545	
	TR 12 – TN 12	39.4	3.9	3.9	6260-6130	
	TR 4	13.0	3.8	3.8	2360	
	TN 4	13.4	3.9	3.9	2325	
	TN 2	7.5	3.9	3.9	1730	
Conjunto asiento pista, punta de torre, orientación y elevación <i>Slewing table assembly, tower head, slewing and hoisting mechanism</i>			22.9	5.4	7.9	9020
Tramo de pluma <i>Jib section</i>	P09 1F (I)	33.3	3.3	3.8	1555	
	P09 2F (II)	33.3	2.8	3.6	1235	
	P09 3L (III)	33.3	2.8	3.6	1245	
	P09 3F (IV)	17.3	2.8	3.3	520	
	P09 4L (V)	17.3	2.8	3.6	550	
	P09 5L (VI)	33.2	2.8	3.6	900	
Polipasto <i>Hook assembly</i>	SR		2.5	0.5	3.1	300
Carro <i>Trolley</i>	SR		3.3	4.4	2.4	245
Contrapluma con plataformas <i>Counterjib with platforms</i>			39.2	4.4	1.3	2080
Plataforma y cabina <i>Platform and cabin</i>			12.1	5.3	7.4	1810
Contrapeso <i>Counterweight</i>	Grande / Big		3.5	1.6	6.6	5205
	Pequeño / Small		3.5	1.6	4.3	3305
Base grúa Testero largo <i>Crane base Long carriage</i>	BTX 38		20.0	2.1	5.0	3475
	BTX 38R		20.0	2.1	5.2	3950
	BTX 45		23.0	2.1	5.2	4550
	BTX 38L		17.9	1.8	3.2	2555
	BTX 38RL		17.9	1.8	2.9	1875
	BTX 45L		13.2	1.8	2.9	1455
	BEX 38		18.2	1.0	4.2	3065
	BEX 38R		18.2	1.0	4.6	3505
	BEX 45		21.5	1.0	4.6	4105
Mecanismo traslación grúa <i>Crane travelling mechanism</i>			3.1	1.8	2.2	645
Lastre <i>Ballast</i>	Ø 8 ft		9.8	1.4	4.3	8155
	Ø 12 ft - Ø 15 ft		13.1	1.1	4.3	9040
	BE 442		6.9	1.1	6.9	7605
	BE 434		11.2	1.1	5.5	9480
Torre de montaje <i>Jacking cage</i>		TMU 1.18	23.4	5.8	5.6	7055
Torre de montaje sin puerta, carro, plataforma carro y viga de apoyo <i>Jacking cage without door, trolley, trolley platform and beam assembly</i>			23.4	5.8	5.6	5400

H	T	Component	Weight (T)	H	T
1	15	TN 4	146.32.000	15	1
2	28	TN 4		28	2
3	67	TN 12	146.31.000	67	3
4	106	TR 12	146.30.000	106	4
5	132	TR 8M	146.30.800	132	5
6	144	T 3-90	133.32.000	144	6
7	154			154	7
8	163			163	8
9	173			173	9
10	196	T6-150	161.31.000	192	9
11	208	TL20/TX150	161.36.000	205	10
12	227	TS20-5.6	204.31.500	235	12
		TSR20-5.6	204.31.000	278	14

AN 90 133.21.000
 AND 90 133.21.800
 AN 150 161.21.000
 AND 150 161.21.050
 AL 20 153.21.800
 ALD 20 160.21.250
 AS 20 160.21.010
 ASD 20/24 160.21.080
 ASR 20 160.21.200
 ASRD 20/24 156.21.000

T: Torre / Tower
 H: Altura / Height

Otras configuraciones de torre / Other tower configuration

Transporte / Transport

H=126 + AN12

2x

3x HIGH CUBE 40'

≤ 6xTN4

TREPADO / CLIMBING

J5010

$h_{max}: 3xTR4 + 6xTN4$

h (ft)	118
D (ft)	29.8 – 32.8
P (lbf)	76880 71260
Rmax (lbf)	20680 56200

TR4: 800.32.300

Trepado interno / Internal climbing

- Viento fuera de servicio / Out of service wind
- Consultar / Consult
- En servicio / In service
- Fuera de servicio / Out of service



LOC & MAT

FEM 1005 – C25

GSM : +33(0)6 11 16 84 14

E-mail : contact@locetmat.com
 Web Site : www.locetmat.com

Tel : +33(0)4 68 92 50 92